


## Low Cap TX Screw – ISO 14580

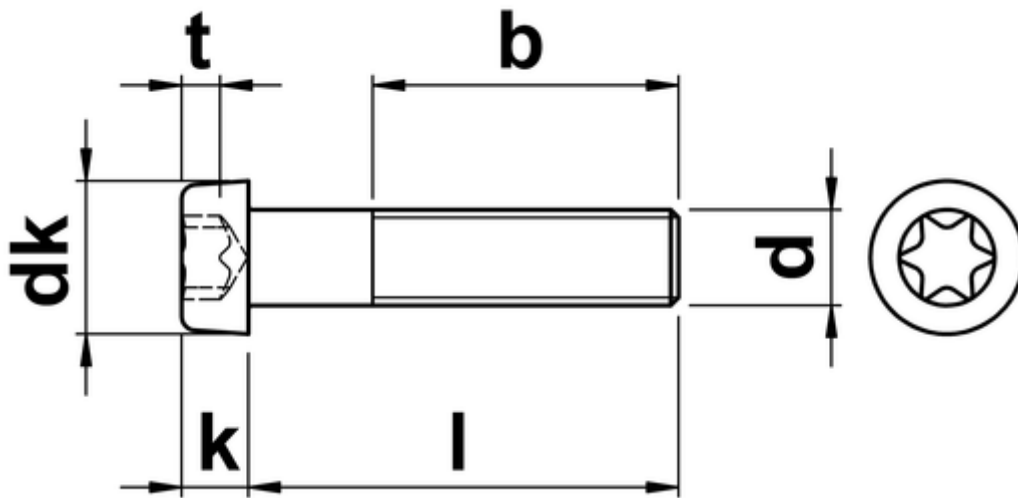

The information in the diagram is for guidance only

d1	M2	M2.5	M3	M4	M5	M6	M8	M10
Dk max	3.80	4.50	5.50	7.00	8.50	10.00	13.00	16.00
K max	1.55	1.85	2.40	3.10	3.65	4.40	5.80	6.90
t min	0.71	0.78	1.01	1.66	1.52	1.90	2.66	3.04
Pitch	0.40	0.45	0.50	0.70	0.80	1.00	1.25	1.50
Drive	T6	T8	T10	T20	T25	T30	T45	T50
Thread max	25	25	25	38	38	38	38	38