


Slotted Spring Pin – Din 1481/ISO 8752

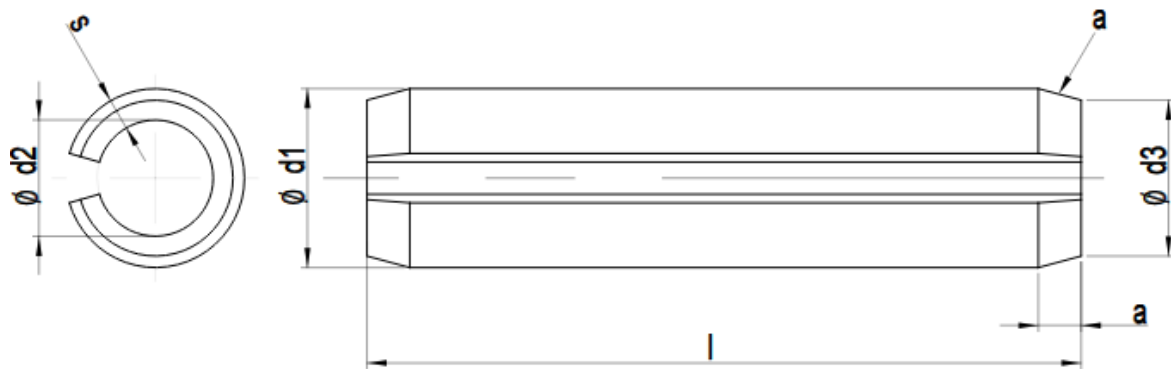

Diameter	d1	d2	s	a	Recommended
	(Expanded)	(Normal)			Hole size
1.0	1.30-1.20	0.80	0.20	0.35-0.15	
1.5	1.80-1.70	1.10	0.30	0.45-0.25	1.5 – 1.6
2.0	2.40-2.30	1.50	0.40	0.55-0.35	2.0 – 2.1
2.5	2.90-2.80	1.80	0.50	0.60-0.40	2.5 – 2.6
3.0	3.50-3.30	2.10	0.60	0.70-0.50	3.0 – 3.1
3.5	4.00-3.80	2.30	0.75	0.80-0.60	3.5 – 3.62
4.0	4.60-4.40	2.80	0.80	0.85-0.65	4.0 – 4.12
4.5	5.10-4.90	2.90	1.00	1.00-0.80	4.5 – 4.62
5.0	5.60-5.40	3.40	1.00	1.10-0.90	5.0 – 5.12
6.0	6.70-6.40	4.00	1.25	1.40-1.20	6.0 – 6.12
8.0	8.80-8.50	5.50	1.50	2.00-1.60	8.0 – 8.15
10	10.80-10.50	6.50	2.00	2.40-2.00	10 – 10.15
12	12.80-12.50	7.50	2.50	2.40-2.00	12 – 12.18
14	14.80-14.50	8.50	3.00	2.40-2.00	